


CE SERIES

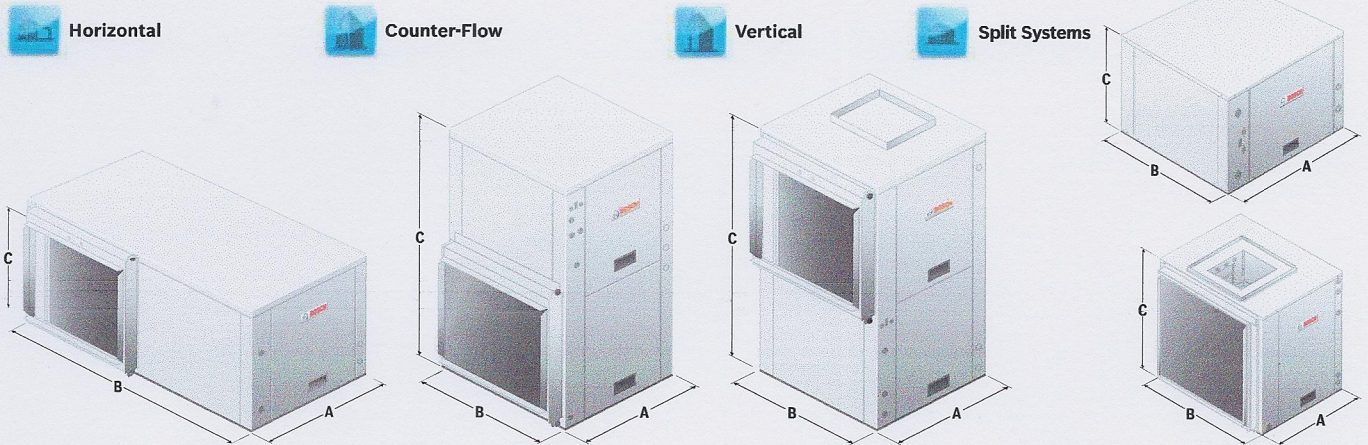

Model	Dimensions CE						Dimensions CE Split Systems								
	Vertical/Counterflow			Horizontal			VT Air Handler			HZ Air Handler			Condensing Section		
	A (width)	B (depth)	C (height)	A (width)	B (depth)	C (height)	A (width)	B (depth)	C (height)	A (width)	B (depth)	C (height)	A (width)	B (depth)	C (height)
CE025	21.50	26.00	47.25	26.00	54.50	21.75	21.50	26.00	25.75	26.00	33.00	21.75	21.50	21.50	21.75
CE035	21.50	26.00	47.25	26.00	54.50	21.75	21.50	26.00	25.75	26.00	33.00	21.75	21.50	26.00	21.75
CE049	24.00	32.75	47.25	30.00	68.00	21.75	24.00	32.75	25.75	38.50	30.00	21.75	24.00	32.75	21.75
CE061	26.00	33.25	51.25	30.00	68.00	21.75	26.00	33.25	27.75	38.50	30.00	21.75	26.00	33.25	21.75
CE071	26.00	33.25	58.25	30.00	78.00	21.75	26.00	33.25	35.75	49.00	30.00	21.75	26.00	33.25	21.75

Model	Fluid Flow Rate	ARI/ISO 13256-1 Performance Data											
		Entering Water Temperatures											
		Water Loop (WLHP)				Ground Water (GWHP)				Ground Loop (GLHP)			
		86°F		68°F		59°F		50°F		77°F		32°F	
		Capacity and Efficiency Data											
	Cooling Capacity	EER	Heating Capacity	COP	Cooling Capacity	EER	Heating Capacity	COP	Cooling Capacity	EER	Heating Capacity	COP	
CE025													
Part Load	6.0	18,800	17.5	20,500	5.1	21,000	30.0	18,000	4.6	20,000	24.5	15,500	4.0
Full Load	6.0	26,000	16.0	30,000	5.0	29,000	24.0	25,000	4.6	27,500	18.7	19,000	3.8
CE035													
Part Load	9.0	24,000	17.0	27,000	5.3	27,000	28.0	22,500	4.5	27,000	24.5	20,500	4.0
Full Load	9.0	36,000	14.6	43,000	4.8	42,000	21.6	36,000	4.2	38,000	17.2	28,000	3.8
CE049													
Part Load	12.0	34,000	16.0	39,000	5.4	38,000	24.0	32,000	4.6	36,000	21.8	28,500	4.0
Full Load	12.0	48,000	13.5	58,000	4.8	54,000	19.0	48,000	4.2	49,000	15.5	38,000	3.6
CE061													
Part Load	14.0	42,000	17.0	48,000	5.4	48,000	26.0	40,000	4.6	45,000	23.5	36,500	4.0
Full Load	14.0	60,000	14.0	72,000	4.7	68,000	19.7	61,000	4.3	62,000	15.7	49,000	3.6
CE071													
Part Load	18.0	51,000	15.8	55,000	4.4	57,000	25.2	47,000	4.0	56,000	21.8	42,000	3.6
Full Load	18.0	72,000	14.5	80,000	4.5	77,000	19.6	68,000	4.2	74,000	16.3	53,000	3.48