


Horizontal Unit Dimensions

Horizontal Water Source Heat Pump

Model	A	B	C	FILTER RACK			RETURN AIR DUCT		J	K	K'	L	M	N	O	P(RH)	P'(LH)	Q	R(RH)	R'(LH)	S	WATER CONNECTIONS	FILTER SIZE
	WIDTH	DEPTH	HEIGHT	HEIGHT	WIDTH	DEPTH	WIDTH	HEIGHT															
													SUPPLY AIR DUCT OPENING										
LM024-HZ	25.1	64.1	19.7	19.5	36.1	3.4	34.0	16.2	17.2	1.3	5.1	2.5	8.1	11.7	9.9	6.5	2.0	10.0	7.5	7.5	10.8	3/4" F.P.T.	18X18X1 (2)
LM036-HZ	28.0	76.0	22.7	22.1	48.1	3.4	46.0	18.2	20.2	1.3	5.1	2.5	8.1	11.7	11.4	7.5	2.0	11.7	9.0	7.7	13.0	1" F.P.T.	20X24X1 (2)
LM048-HZ	28.0	76.0	22.7	22.1	48.1	3.4	46.0	18.2	20.2	1.3	5.1	2.5	8.1	11.7	11.4	7.5	2.0	11.7	9.0	7.7	13.0	1" F.P.T.	20X24X1 (2)
LM060-HZ	28.0	83.0	22.7	22.1	54.1	3.4	52.0	18.3	20.2	1.3	5.1	2.5	8.1	11.7	11.4	7.5	2.0	14.2	6.5	6.5	13.0	1" F.P.T.	18X20X1 (3)
LM070-HZ	28.0	83.0	22.7	22.1	54.1	3.4	52.0	18.3	20.2	1.3	5.1	2.5	8.1	11.7	11.4	7.5	2.0	14.2	6.5	6.5	13.0	1" F.P.T.	18X20X1 (3)

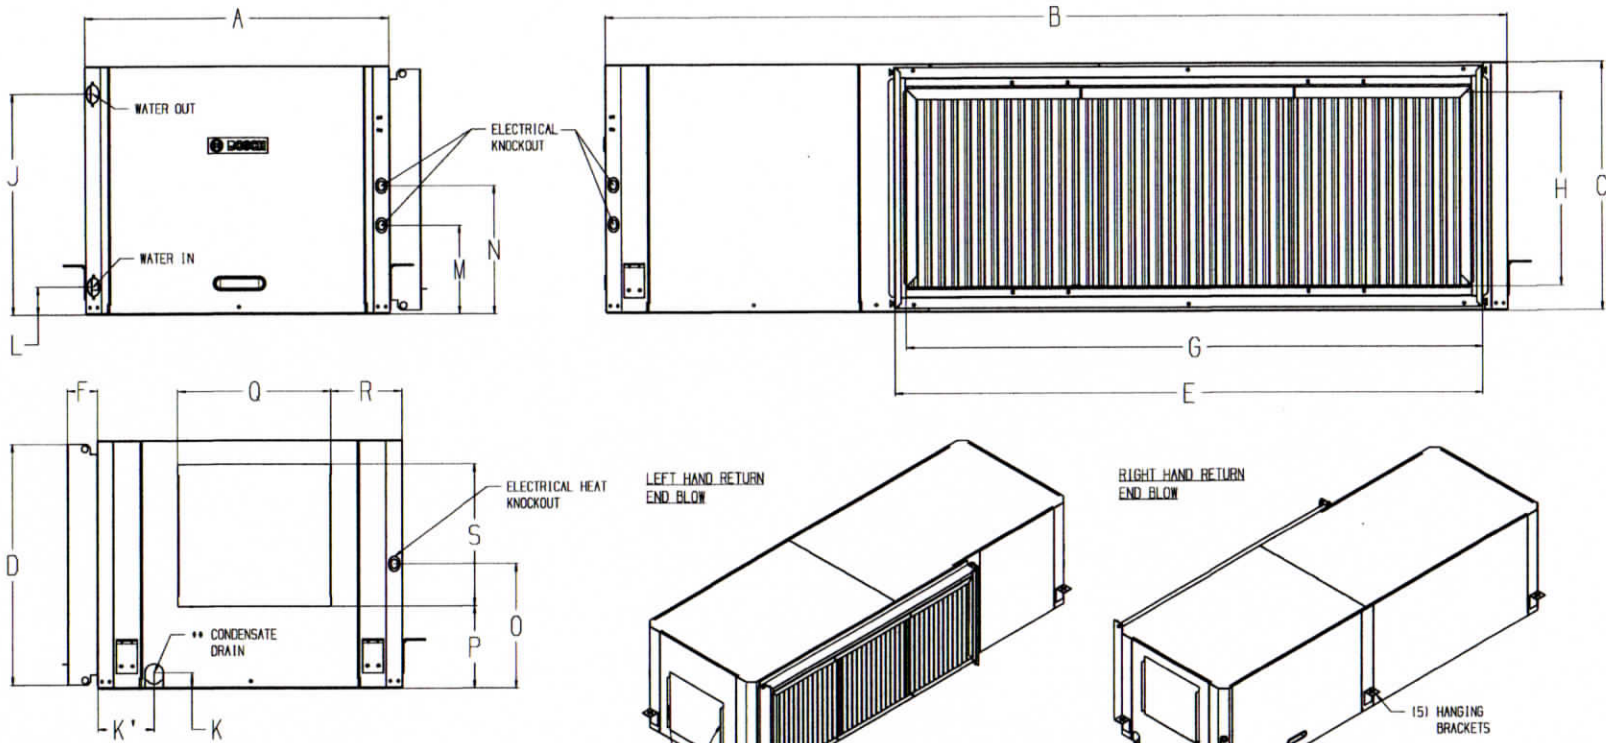

- NOTES**
- ELECTRIC HEAT IS AN OPTIONAL FEATURE
 - CONDENSATE DRAIN CONNECTION - 3/4" FPT
 - ALL DIMENSIONS WITHIN +/- 0.125"
 - RETURN AIR & SUPPLY AIR DUCT FLANGES SHIPPED UNFOLDED
 - ALL DIMENSIONS ARE IN INCHES
 - SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
 - ADD 0.5" TO THE HEIGHT FOR BASE SUPPORT RAILS (NOT SHOWN)
 - UNITS CAN BE FIELD CONVERTED BETWEEN END BLOW AND STRAIGHT THROUGH SUPPLY AIR CONFIGURATIONS WITH KITS

SUPPLY AIR CONFIGURATION: END BLOW