SM-CF Dimensions and Connections

MODEL	A	B	C	D	E	F	G	H	J	K	K'	L	L'	M	N	O	P	Q	R	S	T	T'	U	U'	V	V'	W	W'	WATER CONNECTIONS	FILTER SIZE (Qty/Unit)
	WIDTH	DEPTH	HEIGHT	FILTER RACK HEIGHT	FILTER RACK WIDTH	FILTER RACK DEPTH	RETURN AIR DUCT WIDTH	RETURN AIR DUCT HEIGHT	WATER OUT	DRAIN PORT		WATER IN	WATER IN/OUT	ELECTRICAL KNOCKOUT		HRP KNOCKOUT	HEATER KNOCKOUT	HRP CONNECTIONS			SUPPLY AIR DUCT OPENING									
SM024-CF	22.5	26	43.3	24.4	24.1	2.8	21.8	22.5	38.1	0.8	3.1	28.2	2	33.1	28.8	40.7	5.8	37.1	2	30.2	8.8	8.8	8.8	8.8	6.4	1.5	10.3	10.3	3/4" F.P.T	24x24x2(1)
SM036-CF	24.5	33.3	54	32.3	30.1	2.8	28.3	30.4	49.5	0.8	3.1	35.9	2	40.7	36.5	48.4	5.8	46.5	2	38.9	9.5	9.5	14.4	14.4	4.5	1.5	13.5	13.5	1" F.P.T.	18x30x2(2)
SM048-CF	24.5	33.3	54	32.3	30.1	2.8	28.3	30.4	49.5	0.8	3.1	35.9	2	40.7	36.5	48.4	5.8	46.5	2	38.9	9.5	9.5	14.4	14.4	4.5	1.5	13.5	13.5	1" F.P.T.	18x30x2(2)
SM060-CF	28	33.3	60.1	30.6	30.6	2.8	28.3	38.9	52.5	0.8	3.1	40	2	44.9	40.7	52.6	5.8	48.5	2	43	9.5	9.5	14.4	14.4	4.9	1.8	13.5	13.5	1" F.P.T.	20x30x2(2)
SM070-CF	28	33.3	60.1	40.7	30.6	2.8	28.3	38.9	52.5	0.8	3.1	40	2	44.8	40.7	52.6	5.8	48.5	2	43	9.5	9.5	14.4	14.4	4.9	1.8	13.5	13.5	1" F.P.T.	20x30x2(2)

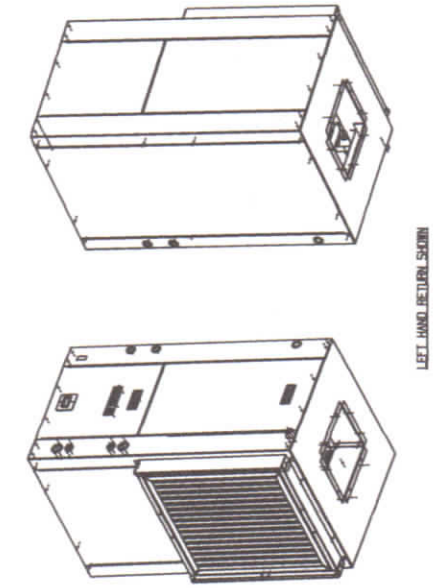

LEFT HAND RETURN SHOWN

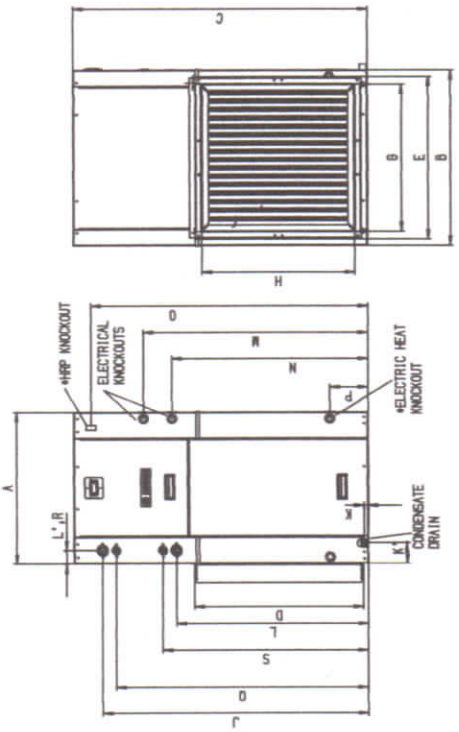





NOTES:
- * HRP & ELECTRICAL HEAT ARE OPTIONAL FEATURES
- ** HRP WATER CONNECTIONS - 1/2" FPT
- ***CONDENSATE DRAIN CONNECTION -3/4" FPT
- ALL DIMENSIONS WITHIN +/- 0.125"
- RETURN & SUPPLY AIR DUCT FLANGES SHIPPED UNFOLDED
- ALL DIMENSIONS ARE IN INCHES
- SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
- SWIVEL TYPE WATER FITTINGS PROTRUDES 1.5" FROM PANEL
- UNIT SHIPPED WITH SWIVEL FITTING 1.00" FPT FOR FIELD INSTALLATION

Bosch Thermotechnology Corp. reserves the right to make changes without notice due to continuing engineering and technological advances | BTC 760108305 A | 05.2016

Tel: 1-866-642-3198 Fax: 1-954-776-5529 www.boschheatingandcooling.com