
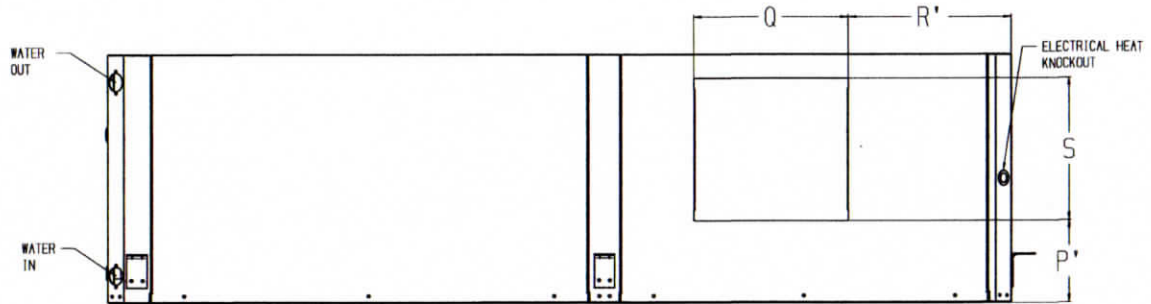
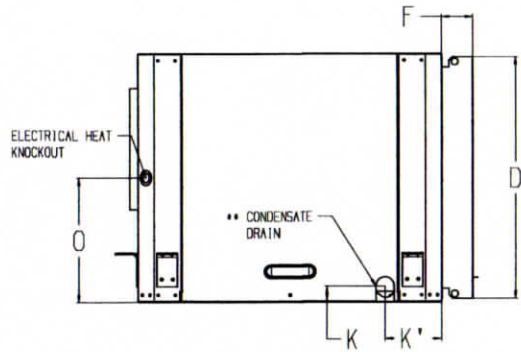
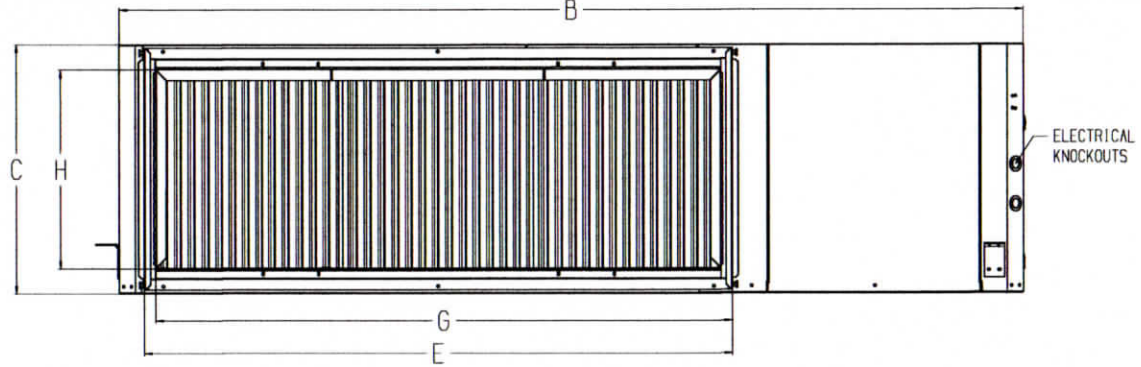


Horizontal Unit Dimensions



Horizontal Water Source Heat Pump

Model	A	B	C	FILTER RACK			RETURN AIR DUCT		WATER OUT	DRAIN PORT	WATER IN	ELECTRICAL KNOCKOUT	HEATER KNOCKOUT	SUPPLY AIR DUCT OPENING					WATER CONNECTIONS	FILTER SIZE			
	WIDTH	DEPTH	HEIGHT	HEIGHT	WIDTH	DEPTH	WIDTH	HEIGHT						P(RH)	P'(LH)	Q	R(RH)	R'(LH)			S		
LMO24-HZ	25.1	64.1	19.7	19.5	36.1	3.4	34.0	16.2	17.2	1.3	5.1	2.5	8.1	11.7	9.9	2.0	6.5	10.0	11.8	11.8	10.8	3/4" F.P.T.	18X18X1 (2)
LMO36-HZ	28.0	76.0	22.7	22.1	48.1	3.4	46.0	18.2	20.2	1.3	5.1	2.5	8.1	11.7	11.4	2.0	7.5	11.7	12.9	12.9	13.0	1" F.P.T.	20X24X1 (2)
LMO48-HZ	28.0	76.0	22.7	22.1	48.1	3.4	46.0	18.2	20.2	1.3	5.1	2.5	8.1	11.7	11.4	2.0	7.5	11.7	12.9	12.9	13.0	1" F.P.T.	20X24X1 (2)
LMO60-HZ	28.0	83.0	22.7	22.1	54.1	3.4	52.0	18.3	20.2	1.3	5.1	2.5	8.1	11.7	11.4	2.0	7.5	14.2	15.1	15.1	13.0	1" F.P.T.	18X20X1 (3)
LMO70-HZ	28.0	83.0	22.7	22.1	54.1	3.4	52.0	18.3	20.2	1.3	5.1	2.5	8.1	11.7	11.4	2.0	7.5	14.2	15.1	15.1	13.0	1" F.P.T.	18X20X1 (3)

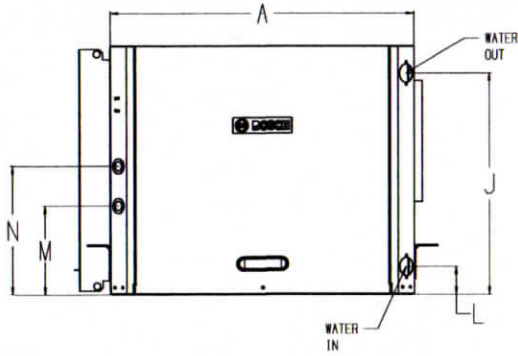

NOTES

- ELECTRIC HEAT IS AN OPTIONAL FEATURE
- CONDENSATE DRAIN CONNECTION - 3/4" FPT
- ALL DIMENSIONS WITHIN +/- 0.125"
- RETURN AIR & SUPPLY AIR DUCT FLANGES SHIPPED UNFOLDED
- ALL DIMENSIONS ARE IN INCHES
- SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
- ADD 0.5" TO THE HEIGHT FOR BASE SUPPORT RAILS (NOT SHOWN)
- UNITS CAN BE FIELD CONVERTED BETWEEN END BLOW AND STRAIGHT THROUGH SUPPLY AIR CONFIGURATIONS WITH KITS



SUPPLY AIR CONFIGURATION:
STRAIGHT THROUGH