


Greensource SM Series Residential Geothermal Heat Pumps



BOSCH

SM-HZ Straight Through Dimensions and Connections

Model	A (A')	B (B')	C (C')	FILTER RACK			RETURN AIR DUCT		WATER	DRAIN	WATER	ELECTRICAL	HRP	HEATER	HRP	SUPPLY AIR DUCT OPENING					WATER	FILTER SIZE				
	WIDTH	DEPTH	HEIGHT	HEIGHT	WIDTH	DEPTH	WIDTH	HEIGHT	OUT	PORT	IN	KNOCKOUT	KNOCKOUT	KNOCKOUT	CONNECTIONS**	S (RH)	S' (LH)	T	U (RH)	U' (LH)	V		CONNECTIONS (SWIVEL TYPE)			
SM024-HZ	25.1 (25.5)	64.1 (64.5)	19.7 (19.82)	18.7	38.4	3.4	34.0	16.2	17.2	1.3	5.1	2.5	7.4	12.3	15.9	9.9	6.5	13.2	2.0	6.5	10.0	11.8	11.8	10.8	1" F.P.T.	18X18X2 (2)
SM036-HZ	28.0 (28.4)	76.0 (76.4)	22.7 (22.82)	20.7	48.4	3.4	46.0	18.2	20.2	1.3	5.1	2.5	8.9	13.8	17.4	11.4	6.5	16.2	2.0	7.5	11.7	12.9	12.9	13.0	1" F.P.T.	20X24X2 (2)
SM048-HZ	28.0 (28.4)	76.0 (76.4)	22.7 (22.82)	20.7	48.4	3.4	46.0	18.2	20.2	1.3	5.1	2.5	8.9	13.8	17.4	11.4	6.5	16.2	2.0	7.5	11.7	12.9	12.9	13.0	1" F.P.T.	20X24X2 (2)
SM060-HZ	28.0 (28.4)	83.0 (83.4)	22.7 (22.82)	20.7	54.4	3.4	52.0	18.3	20.2	1.3	5.1	2.5	8.9	13.8	17.4	11.4	6.5	16.2	2.0	7.5	14.2	15.1	15.1	13.0	1" F.P.T.	18X20X2 (3)
SM070-HZ	28.0 (28.4)	83.0 (83.4)	22.7 (22.82)	20.7	54.4	3.4	52.0	18.3	20.2	1.3	5.1	2.5	8.9	13.8	17.4	11.4	6.5	16.2	2.0	7.5	14.2	15.1	15.1	13.0	1" F.P.T.	18X20X2 (3)

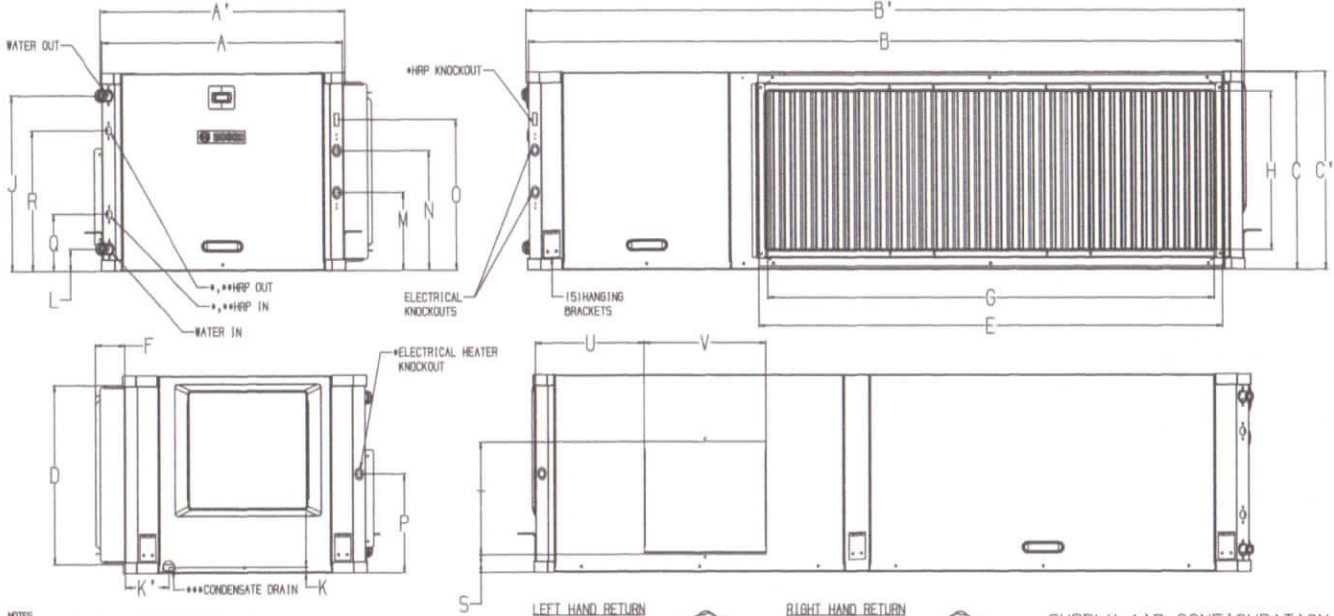

- NOTES**
- * HRP AND ELECTRIC HEAT ARE OPTIONAL FEATURES
 - ** HRP WATER CONNECTIONS - 1/2" FPT
 - ***CONDENSATE DRAIN CONNECTION - 3/4" FPT
 - ALL DIMENSIONS WITHIN 1/4" - 0.125"
 - RETURN AIR & SUPPLY AIR DUCT FLANGES SHIPPED UNFOLDED
 - ALL DIMENSIONS ARE IN INCHES
 - SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
 - (11.1, 10.1, 12.1) = MEASUREMENT WITH PLASTIC CAPS ATTACHED
 - ADD 0.5" TO THE HEIGHT FOR BASE SUPPORT RAILS (NOT SHOWN)
 - UNITS CAN BE FIELD CONNECTED BETWEEN END BLOW AND STRAIGHT THROUGH SUPPLY AIR CONFIGURATIONS
 - EXTERNALLY MOUNTED FEATURES, OPTIONS AND ACCESSORIES MAY ALTER SHOWN DIMENSIONS
 - PLEASE CONTACT CUSTOMER SERVICE FOR FURTHER INFORMATION
 - SWIVEL TYPE WATER FITTING PROTRUDES 1.5" FROM POST